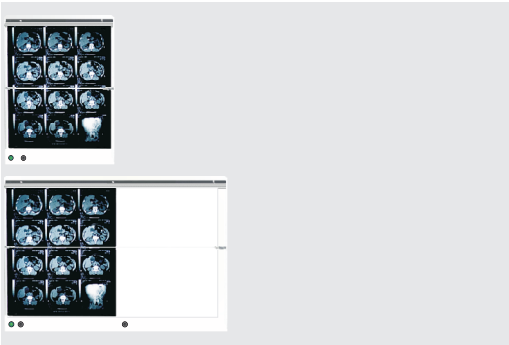


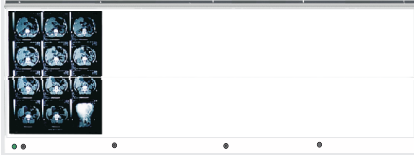
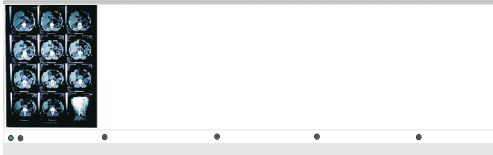




Film viewing unit

Film viewing unit CRYSTAL - VIEW Standard Vario Plus

2 fluorescent tubes per panel, with separate panel switching, with nylon thread
electr. ballasts dimmable, power supply: 220 / 240 V AC 50 / 60 HZ
1 panel = 35 cm, 1 ON / OFF mainswitch per unit, 1 DIMMER per panel
fuses: 2 x 6,3 A, luminance: max. 2000 cd/m², color temp.: 6500 K

	Cat. No.	viewing area l x h (cm)	outer dim. L x h x d (mm)	fluorescent tubes	current cons. (A)	weight (kg)
	0320357	35 x 43	380 x 500 x 90	2 x 15 W	0,16	4,80
	0320707	70 x 43	725 x 500 x 90	4 x 15 W	0,29	7,40
	0321057	105 x 43	1075 x 500 x 90	6 x 15 W	0,48	13,50
	0321407	140 x 43	1424 x 500 x 90	8 x 15 W	0,63	14,70
	0321757	175 x 43	1775 x 500 x 90	10 x 15 W	0,82	17,50
	0322057	2 x 105 x 43	1075 x 960 x 90	2 x 6 x 15 W	1,00	27,00
	0322407	2 x 140 x 43	1425 x 960 x 90	2 x 8 x 15 W	1,26	34,00
Without picture						